

Revox Joy  
Joy in Listening



REVOX

**REVOX**

Dominating Entertainment.  
Revox of Switzerland.



To start with, there was just space

Designing personal space is an uplifting experience.

The goals are clearly defined: to achieve a completely individual living environment, to raise the quality of life and to be able to enjoy life with each sense. Part of this is having a balanced sound architecture within the space.

Equipped with innovative technology of the highest quality. Preferably from Revox, developed and manufactured in Germany and Switzerland. For audiophile enjoyment straight out of the top drawer.

Invite the world of music into your home. With a Revox Joy Audio Network Receiver this multi-talent uses many modern sound sources and offers a huge diversity of functions and operating options. Additionally of course, Joy also offers the classical features of a good stereo system, thanks to the large number of audio inputs. Its audio qualities and its timeless design, combined with top-class materials, make it into the ultimate Network Receiver. Revox Joy will convince you with its powerful performance and will fascinate you with its finest nuances. With the Revox Joy Network Receiver, you will transform your spaces into ultra-modern sound spaces.

Timelessly innovative.

**Revox**

Dominating Entertainment.



## Sustainability

For 60 years, the Revox name has stood for audio products of the highest technical perfection. Products such as the legendary Revox A77 reel-to-reel tape machine, which even after decades, is still seen as a milestone for top-quality audiophilia. This tradition continues today with a modular, upgradable technology concept. Then as now, Revox develops visionary and future oriented products which stand out like a shining beacon in the gloom of mass market mediocrity.

## Controllability

The most advanced technology is only of benefit if it serves the user. The unique Revox system offers its owner a maximum of functionality and design freedom, with a minimum of operating effort. A uniform, intuitive operating concept, where the most important functions can be called at the press of a single button, combined with a consistent, modular construction of the complete system, make the user the master of his own entertainment. Today, tomorrow and for many years to come.

## Individuality

It has always been special to be the owner of a Revox product. And, thanks to an awesome range of excellent speakers in many different sizes and power ranges, which offer impressive design or the subtlety to blend in with their surroundings, exclusive sound solutions can be designed to meet individual tastes. Joy offers you a whole range of options to enjoy music, wherever and whenever you want to. And all with the simplest operation, through streaming or through classical audio sources. Experience your personal Joy audio world in its exclusive design and with its awesome sound. Joy offers a whole wealth of different ways to enjoy music.

## Sound

The completely authentic reproduction of natural sound is the ideal that has defined the Revox brand from the start. Countless international prizes that have been awarded to Revox audio equipment over the decades bear witness to the fact that the company has always remained true to this ideal. With its synthesis of forward-looking technologies, visionary operator concept and excellent sound, the Revox audio/video system enjoys a unique global position today. Right up to the current day, the Revox name stands for unparalleled musical enjoyment of the highest technical level.

Simply beautiful.

**Revox Joy Audio Network Receiver**

Beautifully simple.



## Multimedia taken to the max

The Revox Joy Audio Network Receiver is truly multi-talented, not just in terms of the wide range of sources and functions but also in respect of the operating options and of course the awesome audio qualities that it demonstrates. Timeless design, quality materials such as glass and aluminium and an excellent sound, all packaged into a compact system. The ultimate audiophile network receiver for music lovers who will not accept any compromises. A brilliant performance that is powerful enough to satisfy even the highest demands. But at the same time so restrained that you can enjoy even the quiet sounds, to the max.

## Awesome audio quality

The discretely constructed PWM (Pulse Width Modulation) outputs with up to 2 x 120 Watt provide an impressive confirmation of the many years of competence that Revox has in amplifier development. A particular highlight is that the individual frequency responses of all Revox speakers are stored in the Revox Joy. This means that a specific frequency correction can be carried out for each Revox speaker, resulting in perfect sound quality. And thanks to Revox room compensation, the amplifier's bass characteristics are adapted to the speaker and to its position in the room. Lots of bass if it is free-standing; a reduction in the bass components if it is close to a wall. So simple. And so good. Experience your music with an authenticity previously only possible at a live concert. Music reproduction that impresses.



## Different Versions

The expectations of what a high quality audio system has to deliver are not just determined by personal preferences. The size of the space where the Joy is going to be deployed is also a decisive criterion when it comes to choosing your system. And for that reason, we are presenting the Revox Joy in three versions, S118 / S119 and S120. This then gives you the freedom to choose the solution that is right for you. For complete musical enjoyment, there where you feel most comfortable and most at ease.





## Easy Listening – completely redefined

Within the different streaming sources such as Internet Radio and Music Audio Server, both the remote control and the Apps offer a list-based display that will guide you quickly and simply, through its clear navigation structure, to the track or the radio station you want to listen to.

A particular comfort feature when operating the Audio Server is the Playback Play Sequence. You can decide whether a newly selected piece should be played immediately or only once the previous piece has ended.

Just like you know it from the good old jukebox.

And if you still love your CDs so much that you'd like to hear them again in their original format, you can get maximum enjoyment from this medium as well with the Revox Joy CD Player. The latest generation of the S119 and S120 both have a special interface for the Joy CD player, which enables the audio signal and the control information to be exchanged simply between the devices.



## No drive, no hard disc

The Revox Joy connects itself to your music data very simply through the local network or via WLAN. Enjoy music in the best possible quality from your mobile phone, your MP3 player or your NAS hard disc.

And with the latest generation of the S119 and S120, you can also transmit your music tracks to the amplifier by Bluetooth. To do this, you just use the normal UI of your audio App and simply select the Revox Joy Bluetooth function to transmit the music.

White as standard.

## Revox Joy

Extraordinary power.

### Conspicuously unobtrusive


The Revox Joy speaks the language of clear, minimalism. With its puristic design in matt white or silver, it integrates itself harmoniously into any stylish environment. Conspicuously beautiful: clad in quality glass and aluminium. Together, they give the Revox Joy its very special touch. A marriage in white: combined with the slim Re:sound G column speakers, you achieve a partnership that conveys the best possible impression, both acoustically and optically.



Re:sound G column

### White is right

What the Revox Joy conceals under its discrete yet high-quality shell is sure to bring great joy to audiophile gourmets. Because Revox's tradition for high quality standards continue to make its presence felt within the internal workings of the Revox Joy. From the painstaking selection of individual components to the layout design of the signal routing. Every detail has been optimised to achieve the best possible audio reproduction.

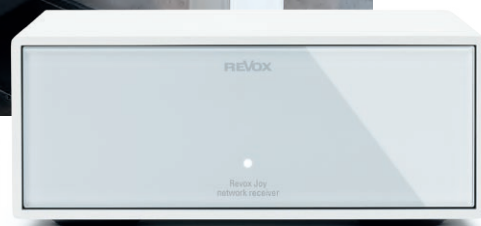

Compact sound miracle.  
**Revox Joy Symphony**  
Powerful and convincing.

### Unobtrusively conspicuous

In these increasingly hectic times, moments of relaxation and enjoyment are all too few and far between. Decide for yourself when and where the moment is right for you to switch the Joy Symphony on and off.

With its timeless, classic design, it integrates itself perfectly even in small spaces but it still remains an eye-catcher. You define the source, whether it is the Internet, a USB stick, a Smartphone, a tablet or a television. The Joy Symphony defines the sound.

### Spectacular sound

As well as through its classic design, in silver-grey with black speaker grilles or completely in white, the Symphony also stands out through its high-quality, multi-braced wooden housing and its true aluminium operating panel. The unit, which may appear to have a somewhat understated effect as a result of the reduced language of its shape, reveals its full potential, once it is switched on.

Two coaxial speakers with a diameter of 108 mm, driven by a 2 x 25 watt sinus amplifier, breathe life into the sound miracle and provide the basis for space-filling audio experience. As you would expect from Revox, the Joy Symphony, created in Germany and Switzerland, ticks all the boxes both in terms of design and sound.





## Luxury on the move

In addition to a 230 V mains power connection, the Joy Symphony also has a 12 V connection making it the ideal companion when travelling. Weighing in at just 7.5 kg and with its compact housing, it is truly a small sound giant.



## Intuitive operation

The Joy Symphony can be controlled completely either through the special Revox remote control or using the Revox iOS and Android Apps. In addition, through buttons on the housing, the volume can be controlled directly and the My Music folder can also be accessed. The folder stores up to 18 entries in the form of radio stations, tracks, albums, artists and complete playlists. Even the alarm clock function can directly access your favourites.



The world as a guest in your home.  
**Revox Joy Audio Network Receiver**  
And everything under control.



### Twice as good

You can operate and configure the Revox Joy Audio Network Receiver in two different ways. Either with the S208 Remote Control with colour display for browsing the lists and displays of information about music tracks, e.g. album covers or Internet radio station logos. Or through the Universal App S232 for iPhone, iPod touch and iPad.

### As smart as your phone

Our philosophy is: Operation must be simple! And this premiss is embodied in the Revox S208 Remote control. Using this attractively designed remote control, you can truly operate Joy, simply and intuitively. And you can also control other audio devices or a television just as easily. You can control up to eight Revox Joy Audio Network Receivers with one remote. As an option, it is also available with a pre-programmed package of commands, macros, that link several functions with one another. The remote control can be modified to your personal requirements using the Joy Easy Creator Software. With the smart S208 from Revox, you have control over your complete entertainment at all times.







The personal music archive.

## Revox Joy Audio Server

Simple and intuitive.

### Intelligent technology

The way to create the perfect audio library has never been as easy as it is with the Revox Joy Audio Server. All you have to do is a one-time definition of your audio quality and then just insert a CD. The server starts the recording immediately and after about ten minutes ejects the CD again automatically. Even metadata is fetched from the Internet from the Gracenote Database and stored during this short period of time. If required, the metadata can be optimised during the recording process and modified to your needs. Of course, if you want to, you can just play a CD through the CD drive. You can even make modifications to increase the user comfort so that your personal preference - record or playback - is the default option

### Strong exclusivity

Few things are as unfading and as timeless as music. Whether it's Mozart, Elvis or The Beatles, your sound is not subject to the whims of fashion.


This consistency and durability are mirrored in the design and in the choice of materials for the Revox Joy Audio Server. High-quality glass in combination with true aluminium underlines its elegant character.

### Get in Touch

When it comes to playing music, the Joy Audio Server can be used in two ways. Up to 16 audio streams can be supplied from the Revox server, working together with Joy Network Receivers, but with other UPnP-based players as well of course.







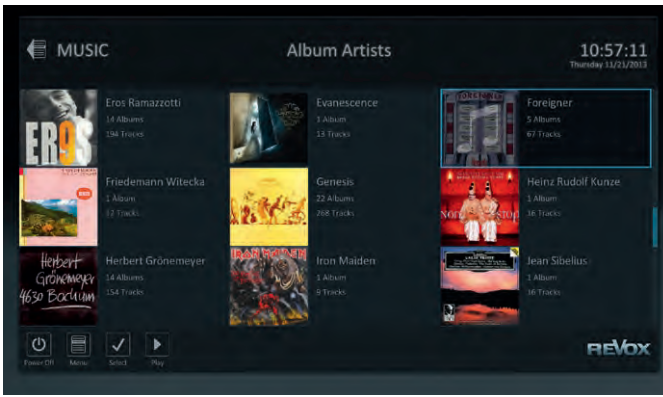

## Simplest operation

With non-network-based applications, the Revox Joy Audio Server sends an audio signal to an amplifier of your choice through the analogue, optical or HDMI output, even in parallel to audio streams. On-screen operation of the server is simple and intuitive through the GUI, where you can also create playlists, make manual recordings and edit the metadata. It is also possible to select and play music through Joy products, using iOS and Android Apps. Playback lists can also be created on the Revox Joy Audio Server using the Apps.

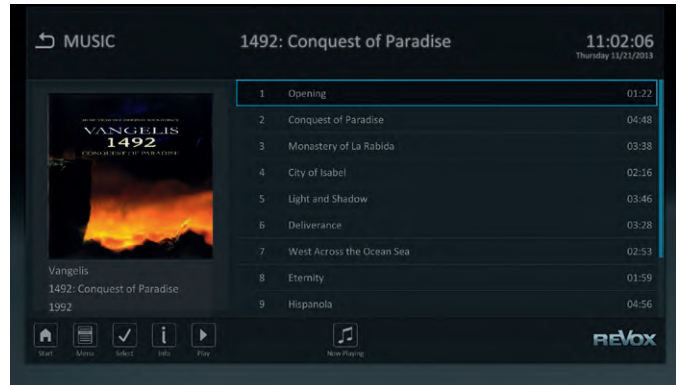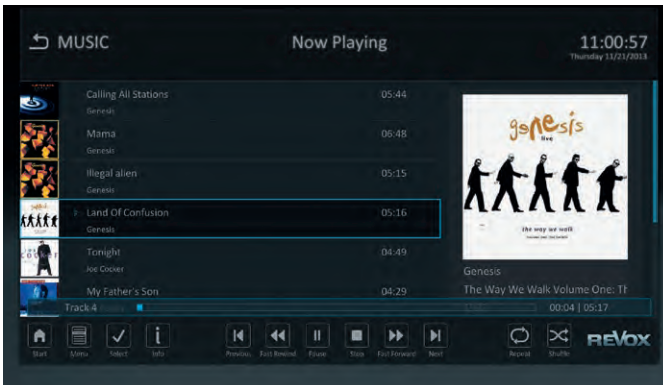

## Flexibility starts at home

Existing music archives can also be copied to the audio server's hard disc or integrated into the database. It is immaterial whether the data is on a PC, on a USB stick or on a NAS drive. Using the Joy App, you can then search through your entire music archive and start playback on the Joy network receivers.



The server offers enough space for up to 700 albums in CD quality or 1,200 albums in FLAC compression. Through the network or through an external solution, storage space can be extended very easily to accommodate very large collections.

It is also possible to set up automatic data backups to external devices, whereby each change is saved for up to 30 days. Data that has been accidentally deleted can be restored easily, even when you only notice two weeks after the event that it has been deleted.



Free for sale.

## Revox Joy CD player

The smart stimulant.

### Hi-end addition to the Joy Family

Insert and enjoy – For over thirty years the CD has been the byword for a high quality and particularly for a comfortable music experience. And the best way is together with the new Joy CD Player. We have developed it especially for this medium – to deliver the maximum in sound fidelity and to meet the highest demands. We have added a new member to the Joy Family with this CD player – compact, stylish and technically perfect.





## Open for everything

The Revox Joy CD player's audio signal is provided either through an analogue output or through one of the two digital outputs, coaxial and optical. Making the Joy CD player suitable for all types of amplifier. It can be controlled through the remote control or directly through the device's front panel.

The Joy CD Player can be connected to a new generation S119 / S120 through the Joy CD Link. The audio signal is sent to the Joy Network Receiver together with the control commands. Third-party control systems can access the CD player's functions bi-directionally through the RS232 interface. For instance, the Revox M Series Communication module, to allow the Joy CD Player to be operated from different rooms in the house.



## Technology, precision and design in perfect harmony

With its solid aluminium housing in white and silver, a glass front panel in black and white, the elegant external appearance of the Joy CD player alone is sure to impress. And music devotees really start to swoon when it comes to the things that truly make it stand out: precision engineering, the latest technology, years of know-how and high quality components right down to the smallest detail. In short, an elegant sound miracle at the highest technical and musical level that will continue to deliver musical enjoyment long into the future. Perfectly balanced to the other products from the Joy range. Build your own personal audio system.



Classic or Modern.

## Revox Joy DAB+/FM Module

You have the choice.

### Access the whole world from your own home

With the optional Revox Joy DAB+/FM module, Revox offers both Internet radio and classic DAB+ and FM radio programmes. The combined module is built into the Revox Joy Audio Network receiver as an option or it can be retrofitted to an existing Revox Joy device.

In addition to Internet Radio, you can create individual station lists and assign these to the three radios, using the two integrable receiver modules. You can choose to create and use the lists through the remote control or using the Apps. In addition to this, your personal favourite stations can be saved to the My Music list and accessed very quickly, for example through the wake-up function. The Play View tells you what radio format you are currently using.

If the station offers this service, this view also gives you more information about the station, such as its name, radio text and frequency.





Intelligent concept.

## KNX integration

Even more functions under control.




### The multi-option interface

Open up a new dimension of the latest functionalities to yourself: Using your Joy Remote Control in conjunction with the Revox IR/KNX Interface, you can even control the functions of a KNX building management system unit.

The combination of Revox Joy, television and KNX controller in the building management offers almost unlimited application options. Your electrical specialist will be happy to advise you when planning a new build or during a renovation project.

The living room is the most usual place to find a Revox remote control being deployed. Because this is where you often use several components, in order to raise comfort levels, e.g. operating the lights and the shutters. An example: You are watching a blockbuster film but the rays of the setting sun are reflecting off the television and spoiling the experience. With the Revox remote control, you can close the shutters without having to stand up or look for another remote. If that makes the room a bit too dark, the press of another button will control the lighting.

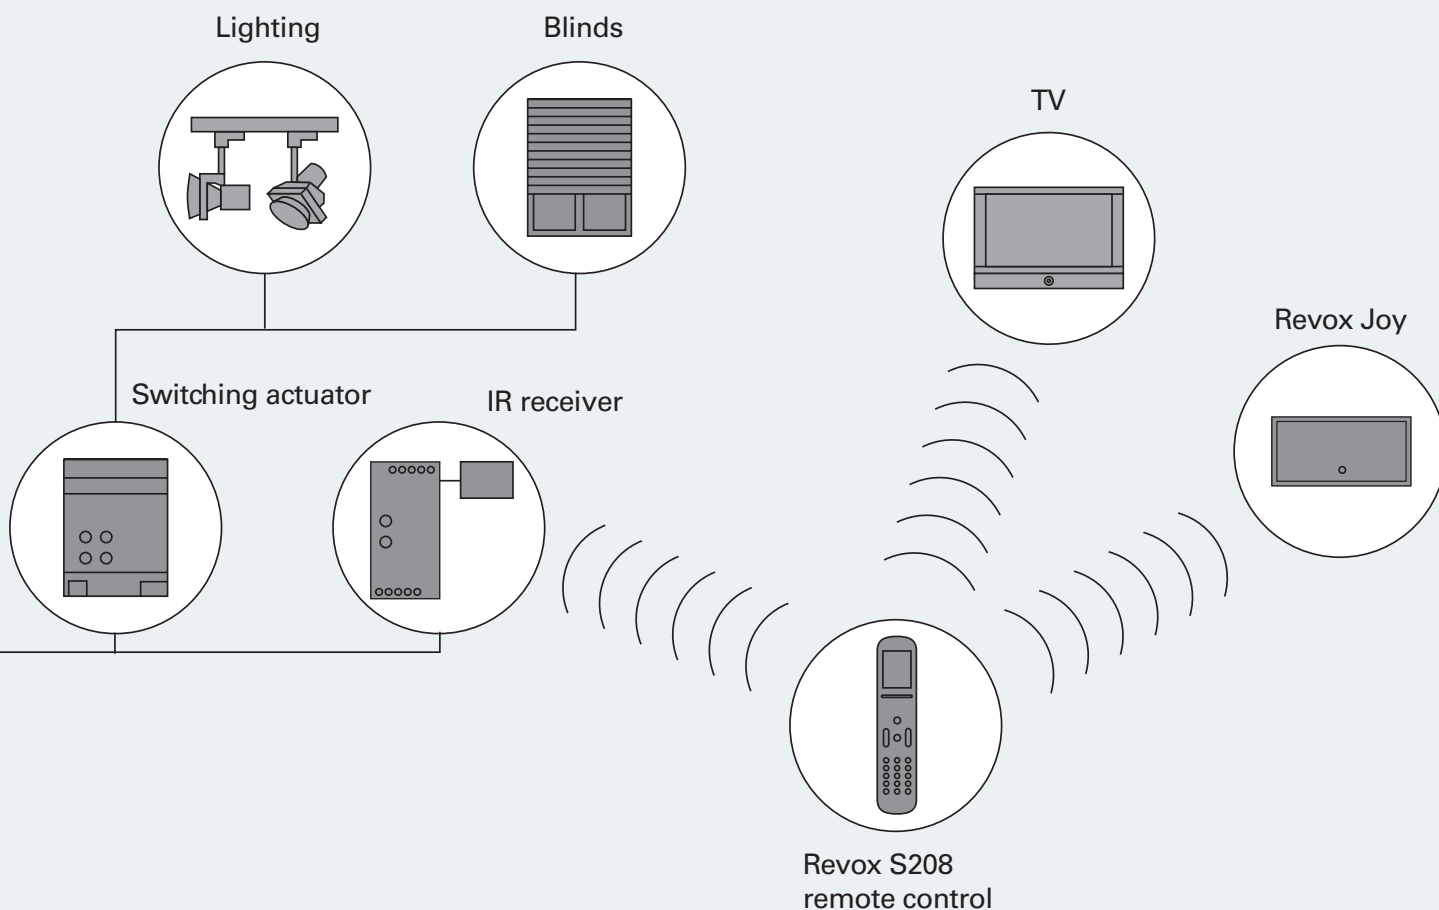



A listening pleasure that you will never tire of.

## Re:sound G series

Fascination in both sound and design.



Re:sound G mini



Re:sound G shelf



Re:sound G elegance

### White and black. From small to large

Whether in an exclusive white or a classic black design, the speakers from the Re:sound G series are masters of their craft. The high-quality front panel made of 8 mm toughened glass already prepares you visually for what these speakers can deliver acoustically in terms of performance: a crystal clear, authentic sound reproduction that is perfect right down to the last detail, with full, deep base sounds, clearly defined mid-ranges and precise trebles. The Re:sound G series offers fascinating sound experiences of the highest quality. From the smart Mini to the large-format Prestige.

### Mini: The small sound giant

With the Re:sound G mini, Revox is launching the smallest speaker in the G series. The Re:sound G mini is the ideal combination for all those who are short on space but who don't want to be sold short on an authentic musical experience. Thanks to many years experience in the development of speakers, we have succeeded in raising the acoustics significantly, resulting in a bass reproduction that, when you take the small dimensions into account, will truly amaze you. The Mini is also available in a subtle white and with an ultra low profile holder, can be mounted elegantly and discretely on any wall.

### Shelf: Reward your work

The ideal speaker for the bookshelf and the workplace. With its file-binder format, the 2-way loudspeaker delivers a perfect sound whilst occupying the minimum space. Actually, it is something of a shame to hide this compact "sound converter" with its high-quality, silver lacquered MDF housing and its black-backed, solid glass front, on a shelf. Almost invisible: With its wall-mounting kit, you can position the Re:sound G shelf for optimum results.

### Column: Slim and powerful

The elegant column speaker combines slenderness with the highest audio quality, perfectly. No compromises were made on sound during the development: D'Appolito chassis assignment for symmetrical emissions and bass reflex support for a broad frequency range, are just two of the excellent qualities of the Re:sound G column 02.



Re:sound G prestige

### Elegance: Powerful but still slim

Subtle in design, forceful in performance. The Re:sound G elegance speaker was developed for music lovers who prefer a slim profile for the speakers in their living room. It was a special challenge for our engineers at Revox to elicit a powerful and deep bass from the narrow housing. Their many years of experience in developing small, high-performance chassis with good stroke characteristics stood them in good stead in mastering this challenge. The result: The housing and chassis of the Elegance were matched using special filters on the crossover network such that it offers soft, rounded but also deep and powerful emission characteristics. This just goes to show that space doesn't have to be an issue when it comes to creating a great musical listening experience.

### Prestige: a powerful entertainer

Complete in white or black and in great shape. The precise and pure sound quality of the slim-designed speakers from the Re:sound S prestige 02 is truly awesome. Four long-throw bass chasses, a low-distortion mid-range speaker and a very reliable tweeter with a large fabric membrane ensure this. Its performance is incredible and packed with power. Whether as a stand-alone stereo speaker or as part of a Surround System.





## The power of quiet sounds

The right music in the right quality at the right place. Life is good and should be enjoyed to the full. With the Re:sound I outdoor 80 outdoor speakers, your receptive ears will be able to delight to the impressive nuances of even the quietest sounds. They were developed to meet the particular requirements of the great outdoors and provide the ideal sound source for the balcony, patio or garden. As wind and weather cannot affect it, the ODS is ideally suited for longterm deployment outside. The wall-mounting bracket makes for very simple and flexible installation. Both horizontal and vertical. The speaker can be swivelled or tilted within the bracket any way you want.


The inside values of our outside speaker also sound really good. The 2-way speaker is equipped with a powerful 130 mm low mid-ranger as well as a 21 mm tweeter calotte. Even outdoors, they deliver powerful and authentic sound reproduction. Additionally, you have the option to equip the ODS with the IR receiver. This makes it possible to control your Revox system from outdoors by IR remote control. Ideally, the corresponding wall-mounted control panel should be located in the house in order to protect it against the elements or against any unwelcome attention.



Making music into an experience.

## Re:sound speakers

Fascinating diversity.

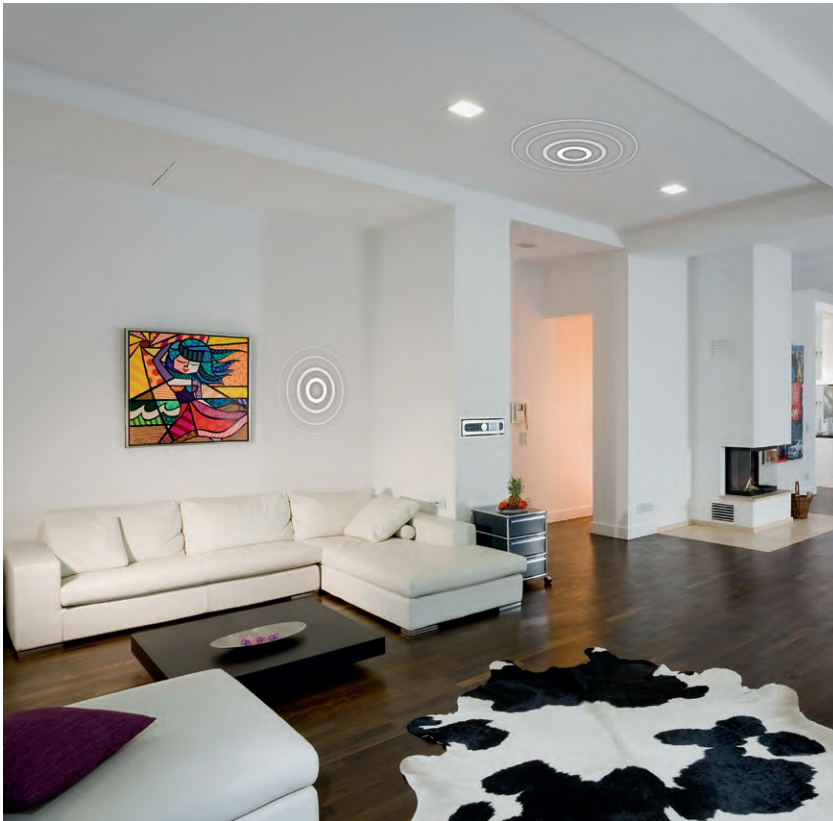

### More free space when listening

Fascinating: Space-filling sound, authentic reproduction. But no cabling or speakers to be seen. The secret is soon uncovered: Re:sound I invisible, the invisible sound source. The panel speakers, at just a few millimetres thick, are installed concealed in ceilings or walls and disappear behind plaster, paint or wallpaper and if required, can be made into "sound pictures".

The special, two-dimension emission characteristics of the Re:sound soundboard guarantee an unbelievably good listening experience everywhere in the room. Irrespective of where the listener is. A broad range of different performance specifications makes it possible to create a sound solution that is ideally suited to every application and every room.

There is no end to the design options: in the bathroom, kitchen, 5.1 Home Cinema, on the patio, in a meeting room or in public areas. Re:sound I invisible gives you almost limitless freedom of design.



### Excellence as standard

Speakers from the Revox series fulfill the highest demands in terms of quality, technology, finish and style. So just let your own personal tastes decide when making your choice. Whether it is the elegant design of the G series or the classic-contemporary stylistic elements of the S series, Revox offers a wide diversity of speakers, from these and all the other Revox series. Making listening to music into a special experience.

You will find more about Revox's competence when it comes to speakers under <http://www.revox.com/en/loudspeaker>

Comfort at the touch of a button.

## TV applications

For maximum pleasure.



### Home Entertainment from a single source

You want to watch television and as well as excellent picture quality, you also want outstanding sound? And if possible just using one remote control? Then Revox Joy is just what you're looking for.

Connect the audio output from your television to one of the many inputs on the Revox Joy Network Receiver. And straight away, you will experience television sound in a completely new dimension. You can get the most out of your S208 Joy Remote Control by using the Easy Creator Software to optimise the user comfort. First select your television from the comprehensive database and then load the remote control commands onto the S208 using a USB cable. This enables you to operate the Revox Joy and your television with just one remote control.

And with just a little practice, with the support of your trained Revox specialist dealer if required, you can achieve even more. You can bundle several commands together so that everything runs seamlessly. With just one press of a button, your television is switched on and at the same time your Revox Joy Network receiver starts up and activates the correct input. So simple, but so good.

Musical dreams of the future.

## Online Services

Any time and anywhere.

### The global living room

The good old collection of vinyl records or CDs is starting to lose its significance as a personal music archive. Because today, as well as the classic audio sources, there are also a whole range of applications for Smartphones or tablets that offer access to audio content of all types. One example is Spotify, a music streaming service that offers online access to a huge number of musical tracks in return for a monthly fee. Another example would be an Internet-based service like YouTube. And the music we all store on our mobile devices should also not be forgotten.





There are various different options for transmitting the audio signals that will allow the music from these services to be experienced in the home with the Joy as well and in the best possible sound quality. For example, over Bluetooth. Almost all Smartphones and tablets are equipped with this technology these days. The latest generation of the S119 / S120 Joy Network receiver also has an integrated Bluetooth receiver that allows it to be paired with mobile devices. Revox recommends transmitting the audio data over Bluetooth to a corresponding receiver, in combination with the Symphony or S118 or the first generation S119 and S120. You will find such a receiver with analogue and/or optical audio outputs at selected specialist outlets. The receiver can be connected to a compatible input on the Revox Joy without any effort. And you can even rename the selected input as "Bluetooth", in order to make your life even easier. Simplicity itself!


The benefit of this solution when compared to one that is fixed-integrated in the product is obvious. You can use your music service on the Smartphone at home just as easily as you can when you are out and about. And of course, it is the music service that you have chosen to use. These days, because there are so many different suppliers, some of which specialise on particular genres, it is effectively impossible to install all these services in one product.

# Revox Joy

## Revox Joy S118 / S119 MKII / S120 MKII

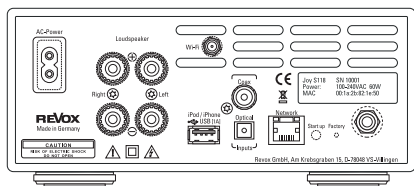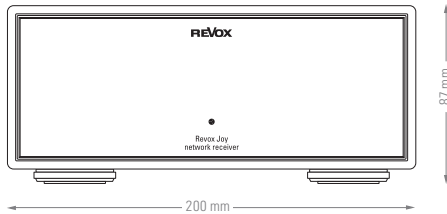



Revox Joy S118

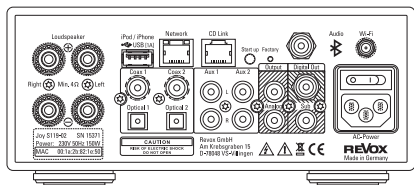

Revox Joy S119 MKII bzw. S120 MKII

Dimensions	H 87 x W 200 x D 183 mm (S118) H 87 x W 200 x D 322 mm (S119 / S120) (please add up 60 mm for cables as a minimum)
Weight	2,0 kg / 4,9 kg / 6,3 kg
Power consumption	max. 80 W / max. 150 W / max. 330 W
Normal operation	5,5 W / 14 W / 20 W
Quickstart	4,5 W / < 3,5 W (S119 / S120)
Standby	< 0,6 W
Temperature range	+10 ... 40 °C
Output power	2 x 25 W / 2 x 60 W / 2 x 120 W RMS 2 x 25 W / 2 x 80 W / 2 x 160 W impulse power
Damping factor	20 at 1 kHz and 8 Ohm / 100 at 1 kHz and 8 Ohm
Harmonic distortion	0,05 % at 1 W and 4 Ohm / < 0,005 % at 25 W and 4 Ohm
Analogue inputs	0 / 2 / 2 500 mV / 39 kOhm
Digital inputs	1 / 2 / 2 optical, 1 / 2 / 2 coaxial, 16, 20, 24 bit PCM, SPDIF to 192 kHz
Subwoofer out	0 / 1 / 1
Pre out	0 / 1 / 1
Digital out	0 / 1 / 1
Bluetooth	0 / 1 / 1
CD Link	0 / 1 / 1
Audio formats	AAC, AIFF, FLAC, MP3 (cbr + vbr), OGG-Vorbis, WAV, WMA
Playlist formats	M3U, PLS
Supported Media servers	UpnP AV 1.1 & DLNA-compatible servers
Gapless Audio	MP3 and AAC (require gapless tags)



## Revox Joy Symphony

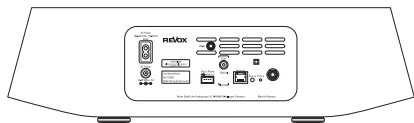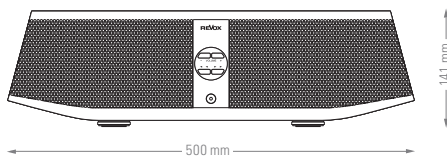

Dimensions	H 141 mm x W 500 mm x D 300 mm
Weight	7,3 kg
RMS performance	2 x 25 W Sinus
Frequency	42 Hz - 22 kHz
Harmonic distortion	0,05 % at 1 Watt and 4 Ohm
Digital inputs	1 x optical digital and 1 x coaxial digital with 16, 20, 24 bit PCM to 192 kHz
Speakers	2 x 108 mm Coax - 2 way
Max SPL	105 dB

All other specifications are equal to S118 specifications.

## Revox Joy Audio Server

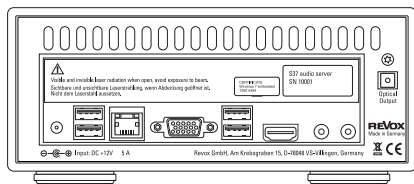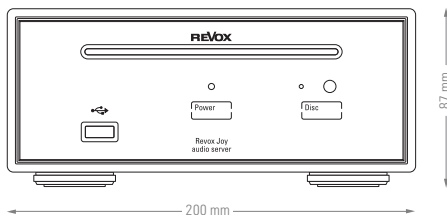


Dimensions	H 87 mm x W 200 mm x D 322 mm (without cable) (please add up 60 mm for cables as a minimum)
Weight	3,4 kg
Power supply	External power supply Recommended 12 V ; 5,5 A Inside 8 - 19 Volt Outside GND
Power consumption	typical 15 Watt max 40 Watt
Stand-by	< 1 Watt

### Data Audio Video

Audio output	Optical to 192 kHz 24 bit, HDMI to 96 kHz 24 bit, analogue
Video output	HDMI 1920 x 1080, VGA
Audio formats	AAC, AC, DTS, DTS HD, EAC3, FLAC, LPCM, MAC, MP1, MP2, MP3, Vorbis, WMA lossless



## Revox Joy CD player

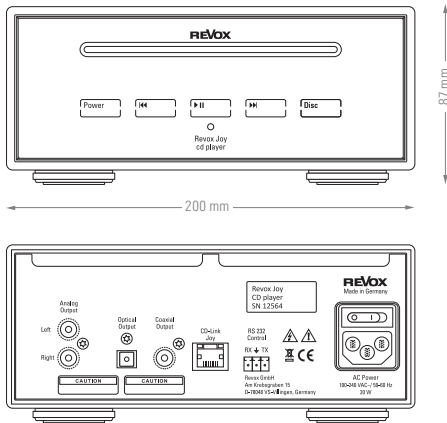

Dimensions	H 87 mm x W 200 mm x D 183 mm
Weight	3,05 kg
Power consumption	0,4 W (Standby) / 7,5 W $\pm$ 1,5 W (Operation)
Temperature range	+10 ... 40 °C
Supported format	CD-DA in according with RED-Book Standart
Control	IR RC5 Commands RS232 Control
Main voltage	100 - 240 VAC <sup>~</sup> / 50 - 60 Hz


### Analogue output

Frequency range	5 Hz - 20 kHz
THD + Noise	< 0,0019 %
Dynamic range	118 dB
DC-Offset	0,0005 Volt
SN ratio	> 110 dB at 1 kHz
Channel separation	> 97 dB at 1 kHz

### Digital output Coaxial (1x) / Optical (1x)

Frequency range	5 Hz - 20 kHz
THD + Noise	< 0,0018 %
Data format	44,1 kHz / 16 bit

## Revox Joy S208 remote control

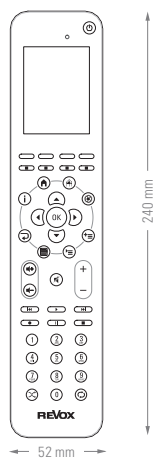


Remote control for Revox Joy products, with colour display. IR commands can be programmed through a database, using the Easy Creator software.

Width 52 mm  
Length 240 mm  
Height 20 mm  
Weight 190 g incl. integrated rechargeable battery

IR range	8 m
RF range	up to 65 m in open area
Frequency	2,4 GHz
Display	240 x 320 Pixel
Data rate	up to 2 Mbps
Operation time	approx. 1 week at normal operation

## Revox Joy S208 dockingstation

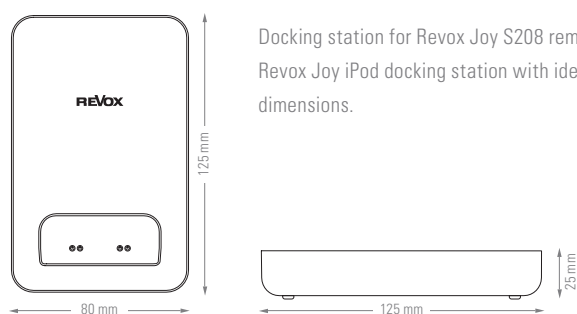


Docking station for Revox Joy S208 remote control. Revox Joy iPod docking station with identical dimensions.

Width	80 mm
Depth	125 mm
Height	25 mm
Weight	200 g

# Re:sound G speaker series


## Re:sound G prestige speakers



2 way bass reflex  
 W 140 mm (foot 260 mm)  
 D 270 mm (foot 390 mm)  
 H 1262 mm (foot 12 mm)  
 Weight 23 kg  
 MDF cabinet lacquered with  
 real glass front

Power rating	140 Watt
Music power handling capacity	180 Watt
Impedance	4 Ohm
Frequency response	36 Hz–30 kHz
Efficiency (2.83V/1m)	87 dB
Woofer	4 x 116 mm, aramid yarn
Midrange	1 x 116 mm, aramid yarn
Tweeter	30 mm, fabric dome type


## Re:sound G elegance speakers



2,5 way bass reflex  
 W 104 mm (foot 215 mm)  
 D 104 mm (foot 270 mm)  
 H 1112 mm (foot 12 mm)  
 Weight 11,4 kg  
 MDF cabinet lacquered with  
 real glass front

Power rating	120 Watt
Music power handling capacity	150 Watt
Impedance	4 Ohm
Frequency response	40 Hz–30 kHz
Efficiency (2.83V/1m)	88 dB
Woofer/Midrange	4 x 90 mm aluminium, shielded
Tweeter	30 mm mm aluminium dome, neodym system


## Re:sound G column speakers



2 way, d'Appolito, bass reflex,  
 HP filtered  
 W 104 mm (foot 215 mm)  
 D 104 mm (foot 215 mm)  
 H 1112 mm (foot 12 mm)  
 Weight 8,7 kg  
 MDF cabinet lacquered with  
 real glass front

Power rating	70 Watt
Music power handling capacity	100 Watt
Impedance	4 Ohm
Frequency response	42 Hz–30 kHz
Efficiency (2.83V/1m)	87 dB
Woofer/Midrange	2 x 90 mm aluminium, shielded
Tweeter	30 mm mm aluminium dome, neodym system


## Re:sound G shelf speakers



2 way, d'Appolito, bass reflex,  
 HP filtered  
 W 104 mm  
 D 218 mm  
 H 320 mm  
 Weight 4 kg  
 MDF cabinet lacquered with  
 real glass front

Power rating	70 Watt
Music power handling capacity	100 Watt
Impedance	4 Ohm
Frequency response	45 Hz–30 kHz
Efficiency (2.83 V / 1m)	90 dB
Woofer/Midrange	2 x 90 mm aluminium, shielded
Tweeter	25 mm aluminium dome, neodym system

## Re:sound G mini speakers



2 way  
 W 104 mm  
 D 130 mm  
 H 180 mm  
 Weight 1,8 kg  
 MDF cabinet lacquered with  
 real glass front

Power rating	50 Watt
Music power handling capacity	70 Watt
Impedance	4 Ohm
Frequency response	55 Hz–30 kHz
Efficiency (2.83 V / 1m)	89 dB
Woofer/Midrange	1 x 90 mm aluminium, shielded
Tweeter	25 mm aluminium dome, neodym system

Further technical specifications are to be found under [www.revox.de](http://www.revox.de) or in the Revox main catalogue



**REVOX**

Dominating Entertainment.  
Revox of Switzerland.

# REVOX

Dominating Entertainment.  
Revox of Switzerland.

#### **Revox GmbH**

Am Krebsgraben 15, D 78048 VS-Villingen

Tel.: +49 7721 8704 0

info@revox.de

www.revox.de

#### **Revox (Schweiz) AG**

Wehntalerstrasse 190, CH 8105 Regensdorf

Tel.: +41 44 871 66 11

info@revox.ch

www.revox.ch

#### **Revox Handels GmbH**

Josef-Pirchl-Strasse 38, AT 6370 Kitzbühel

Tel.: +43 5356 66 299

info@revox.at

www.revox.at



Your direct access to <http://joy.revox.com>